

# Hybrid Solar Inverter HMS 6.2KW Series



### Smart control

Smart control mode, auto switch for different demand  
usb communication portal





### Wide PV Range

90-500v panels quantity depends on different situations



### Charger

Inbuilt 50A AC charger  
Inbuilt 120A MPPT solar charger

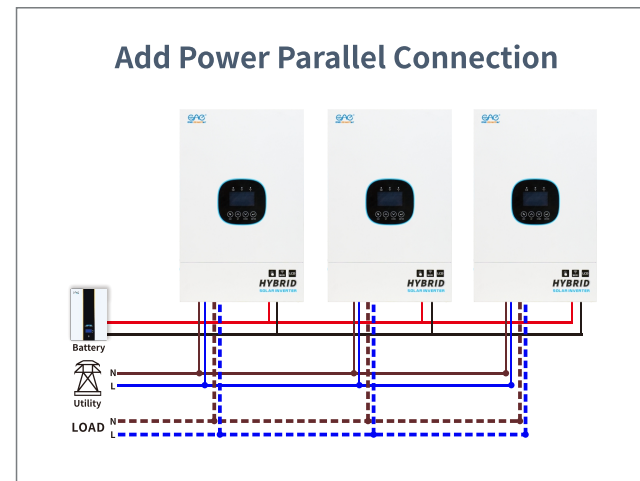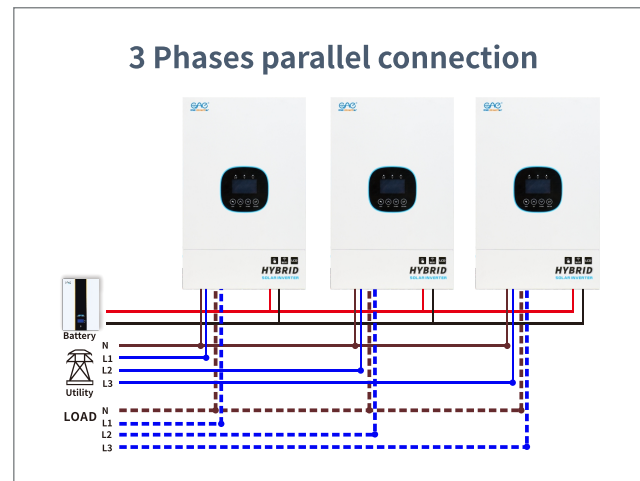

# Technical Specification

MODEL	HMS-4862M120
Rated Power	6.2KW
Input Voltage Waveform	Sinusoidal (utility or generator)
Nominal Input Voltage	230Vac
Low Loss Voltage	170Vac±7V (UPS); 90Vac±7V (Appliances)
Low Loss Return Voltage	180Vac±7V (UPS); 100Vac ±7V (Appliances)
High Loss Voltage	280Vac±7V
High Loss Return Voltage	270Vac±7V
Max AC Input Voltage	300Vac
Max AC Input Current	50A
Nominal Input Frequency	50Hz / 60Hz (Auto detection)
Low Loss Frequency	40±1Hz
Low Loss Return Frequency	42±1Hz
High Loss Frequency	65±1Hz
High Loss Return Frequency	63±1Hz
Output Short Circuit Protection	Line mode: Circuit Breaker Battery mode: Electronic Circuits
Efficiency (Line Mode)	>95%(Rated R load, battery full charged)
Transfer Time	10ms typical (UPS); 20ms typical (Appliances)
Output power de-rating: For 6.2KW models, when AC input voltage under 170V the output power will be de-rated.	
Output Voltage Waveform	Pure Sine Wave
Output Voltage Regulation	230Vac±5%
Output Frequency	60Hz or 50Hz
Peak Efficiency	93%
Overload Protection	100ms@≥205% load; 3s@≥150%load;5s@110%-150%load
Surge Capacity	2*rated power for 5 seconds
High DC Cut-off Voltage	66Vdc
Low DC Cut-off Voltage	44Vdc
Nominal DC Input Voltage	48Vdc
Cold Start Voltage	46.0Vdc
Low DC Warning Voltage	46.0Vdc
0 load<-20%	42.8Vdc
@ 20%≤load <-50%	40.4Vdc
Low DC Warning Return Voltage	48.0Vdc
@ load <-20%	44.8Vdc
@ 20%≤load<50%	42.4Vdc
Low DC Cut-off Voltage	44.0Vdc
@ load<20%	40.8Vdc
@ 20%≤load<50%	38.4Vdc
High DC Recovery Voltage	64Vdc
High DC Cut-off Voltage	66Vdc
DC Voltage Accuracy	+/-0.3V@ no load
THDV	<5% for linear load,<10% for non-linear load @ nominal voltage
DC Offset	≤100mV
Charging Current (UPS)	80A
Bulk Charging Voltage	Flooded Battery: 58.4Vdc AGM / Gel Battery: 56.4Vdc
Floating Charging Voltage	54Vdc
Overcharge Protection	66Vdc
Charging Algorithm	3-Step
Charging Curve	
Solar Input	6.2KW
MODEL	7000W
Rated Power	500Vdc
Max. PV Array Open Circuit Voltage	90Vdc~450Vdc
PV Array MPPT Voltage Range	27Ax1
Max.Input Current	120Vdc+/-5Vdc
Start-up Voltage	120A
Maximum Charging Current	
Power Limitation	
MODEL	6.2KW
Safety Certification	CE
Operating Temperature Range	-10°Cto40°C
Storage temperature	-15°C~60°C
Humidity	5% to 95% Relative Humidity (Non-condensing)
Product Size (D*W*H)	528mm*325mm*131mm
Packing Size (D*W*H)	583mm*405mm*217mm
N.W.(Kg)	12.2KG
G.W.(Kg)	13.8KG
Max parallel numbers	6
Circulation Current under No Load Condition	Max 2A
Power Unbalance Ratio	<5% @ 100% Load
Parallel communication	CAN
Transfer time in parallel mode	Max 50ms
Parallel Kit	YES

Note: Parallel feature will be disabled when only PV power is available